


Wire and Cable Insulation

Automotive / Auto Electronics & Electricals / Wire & Cables

Print Date: 2025-12-05

Benefits

- Arnitel® UM551 in use for convoluted tubes or cable protection under-the-bonnet.

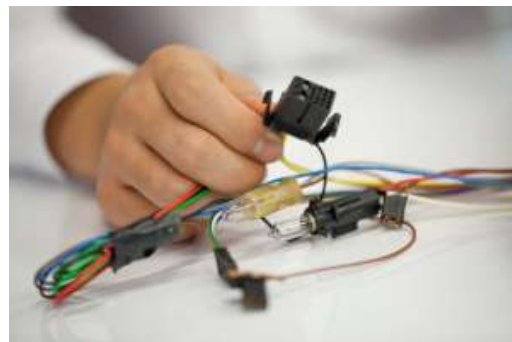

Details

Arnitel® TPC allows for reliable solutions due its high temperature resistance (class T3 and T4, Class D (150°C) enabling thin and ultra thin wall designs, Class E (175°C) >20 mm2 thick and thin wall); Arnitel® TPC allows for cost effective solutions (up to 50% lower system costs versus ETFE/FEP, 40% weight down versus XL PO at similar costs); Arnitel® TPC allows for sustainable solutions due to availability of halogen free flameretardant grades

Products

Arnitel® CM550-S
TPC-ES FR(17)

Arnitel® CM551
TPC-ES

Arnitel® CM600-V
TPC-ES FR(30)

Arnitel® CM620-S
TPC-ES FR(17)

Arnitel® CM622
TPC-ES

Arnitel® UM551
TPC-ES

Speciality products

Arnitel® XG

Seller represents and warrants exclusively that on the date of delivery by Seller the product shall be in conformity with the specifications agreed upon. Seller makes no other representations or warranties, whether express or implied.

Seller is not responsible or liable for the design of the products of the Customer and it is the responsibility of the Customer to determine that the Seller's product is safe, complies with application laws and regulations, and is technically or otherwise fit for its intended use. Seller does not endorse or claim suitability of its products for a specific application and disclaims each and every representation or warranty, whether express or implied, in that respect.

Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values.

Copyright © Envalior 2025. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Envalior.