


Motor Starter/Overload Relays

Electrical | Power distribution

Print Date: 2024-10-30

Benefits

- Most grades are available with halogenfree flameretardancy, and in specific electro-grey colour for housings. Also Lasermarkable grades are available. ForTii® has a Heat Deflection Temperature (HDT) of 305°C .

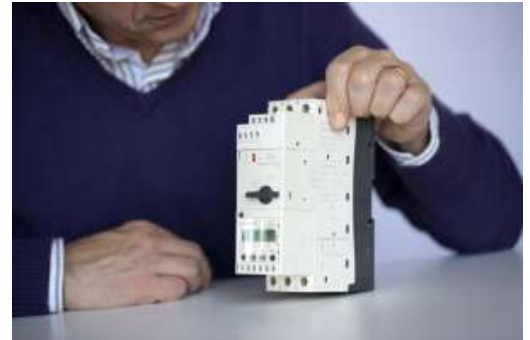

Details

Akulon® PA6, Arnite® PBT, Stanyl® PA46 and ForTii® PA4T allow for reliable solutions due to good electrical and thermal endurance; Akulon® PA6, Arnite® PBT, Stanyl® PA46 and ForTii® PA4T allow for more design freedom and/or potential system cost reductions due to part integration and thinner wall design and lower profiles possibilities, reduced cycle time with lower production losses

Products

ForTii® F11
PPA-GF30 FR(40)

Stanyl® TE250F6
PA46-GF30 FR(17)

Akulon® K222-KGV4
PA6-GF20 FR(30)

Akulon® K225-KS
PA6 FR(30)

Arnite® TV4 251 XG2
PBT-GF25 FR(30+40)

Arnite® TV4 264 SN
PBT-GF30 FR(17)



Seller represents and warrants exclusively that on the date of delivery by Seller the product shall be in conformity with the specifications agreed upon. Seller makes no other representations or warranties, whether express or implied.
Seller is not responsible or liable for the design of the products of the Customer and it is the responsibility of the Customer to determine that the Seller's product is safe, complies with application laws and regulations, and is technically or otherwise fit for its intended use. Seller does not endorse or claim suitability of its products for a specific application and disclaims each and every representation or warranty, whether express or implied, in that respect.

Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values.

Copyright © Envalior 2024. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Envalior.