

# Akulon® Diablo

## PA66

Print date: 2024-03-05

### **Grade coding**

Akulon® Diablo PA66 reinforced blow molding grade.

### **MATERIAL HANDLING**

#### **Storage**

In order to prevent moisture pick up and contamination, supplied packaging should be kept closed and undamaged. For the same reason, partial bags should be sealed before re-storage. Advisable is storage at room temperature.

#### **Packaging**

Akulon® Diablo grades are supplied in airtight, moisture-proof packaging.

#### **Moisture content as delivered**

Akulon® Diablo grades are packaged at a moisture level  $\leq 0.15$  w%.

#### **Conditioning before molding**

To prevent moisture condensing on granules, bring cold granules up to ambient temperature in the molding shop while keeping the packaging closed.

#### **Moisture content before blow molding**

We advise to pre-dry / condition (see drying section below). Furthermore, pre-drying is required in case the material is exposed to moisture before blow molding (package damaged or open for longer period of time).

Moisture content can be checked by water evaporation methods or manometric methods (ISO 15512) e.g. Karl Fisher.

While processing polymers that absorb moisture such as polyamides, care must be taken to assure that the moisture content of resin, as well its regrind, is maintained at a maximum level of 300 ppm.

#### **Drying**

Akulon® Diablo grades are hygroscopic and absorb moisture from the air relatively quickly.

Preferred driers are de-humidified driers with dew points maintained between -30 and -40°C (-22 and -40°F)

Vacuum driers with N<sub>2</sub>purge can also be used. Hot air ovens or hopper driers are not suitable for pre-drying Akulon® Diablo grades; the use of such driers may result in non-optimum performance.

#### **All the trademarks mentioned here are trademarks of Envalior.**

Seller represents and warrants exclusively that on the date of delivery by Seller the product shall be in conformity with the specifications agreed upon. Seller makes no other representations or warranties, whether express or implied.

Seller is not responsible or liable for the design of the products of the Customer and it is the responsibility of the Customer to determine that the Seller's product is safe, complies with application laws and regulations, and is technically or otherwise fit for its intended use. Seller does not endorse or claim suitability of its products for a specific application and disclaims each and every representation or warranty, whether express or implied, in that respect.

Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values.

Copyright © Envalior 2023. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Envalior.

# Akulon® Diablo

Print date: 2024-03-05

Moisture Content	Time*	Temperature	
		[°C]	[°F]
0.1 – 0.2 and as delivered	4 – 8	100	212
0.2 – 0.5	> 8	100	212

## **Regrind**

In the blow molding process regrind is generated. Regrind can be used taking into account that this regrind must be clean/low dust content/not thermally degraded/dry, of same composition and similar particle size as the original material. The level of regrind depends on the application requirements e.g. 30 – 50% is acceptable.

The Akulon® Diablo regrind is most of the time generated at elevated temperature. The moisture uptake is quicker at elevated temperature and higher humidity level. The regrind should be stored preferably in a closed bin and dried according above mentioned conditions

## **MACHINERY**

Akulon® Diablo grades can be processed on general 3D blow molding machines.

## **Die Swell**

In the blow molding process die swell is observed as the plastic parison expands because of plastic memory. For the Akulon® Diablo grade the die swell will be around 1.1 to 1.4 depending on die design

## **Screw geometry**

It is recommended to use gradual compression screw; L/D length/diameter ratio 24 -25 designs with volumetric compression ratios of approximately 2.5 (depth feed zone / depth metering zone) works fine.

A shorter screw may result in inhomogeneous mixing, while an improper compression ration may result in air entrapment or overheating and degradation of the melt.

## **Steel type**

Abrasive resistant tool steels which are normally used for glass and/or mineral reinforced materials are also to be used for Akulon® Diablo polymers in dies and screws.

**All the trademarks mentioned here are trademarks of Envalior.**

Seller represents and warrants exclusively that on the date of delivery by Seller the product shall be in conformity with the specifications agreed upon. Seller makes no other representations or warranties, whether express or implied.

Seller is not responsible or liable for the design of the products of the Customer and it is the responsibility of the Customer to determine that the Seller's product is safe, complies with application laws and regulations, and is technically or otherwise fit for its intended use. Seller does not endorse or claim suitability of its products for a specific application and disclaims each and every representation or warranty, whether express or implied, in that respect.

Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values.

Copyright © Envalior 2023. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Envalior.

# Akulon® Diablo

Print date: 2024-03-05

## TEMPERATURE SETTINGS


### Mold temperature

Akulon® Diablo can be used with a wide range of tool temperatures (60 - 100°C / 140 - 212°F). However, to avoid the parison to cool down due to mold contact and to achieve optimal wall thickness distribution and good surface appearance, it is recommended to apply a tooling temperature at the higher side (100°C / 212°F).

### Barrel temperature

Optimal settings are governed by barrel size and residence time. Due to the high viscosity of the material and melting point of Akulon® Diablo the temperature should be set high enough at the entrance to provide a homogeneous melt. A descending temperature profile is recommended to reduce the torque of the extruder.

	Extrusion Zones			Accumulator	Resin	Mold
	Feed	Compression	Metering	Storage	Melt	Temperature
°C	260 - 290	265 - 285	250 - 280	270 - 290	270 - 290	60 - 100
°F	500 - 554	509 - 545	482 - 536	518 - 554	518 - 554	140 - 212

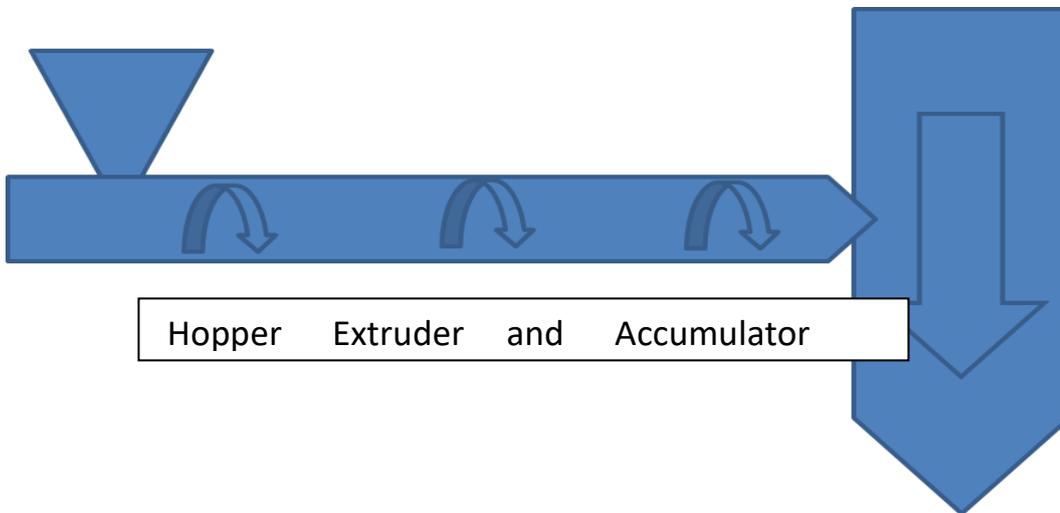

### All the trademarks mentioned here are trademarks of Envalior.

Seller represents and warrants exclusively that on the date of delivery by Seller the product shall be in conformity with the specifications agreed upon. Seller makes no other representations or warranties, whether express or implied.

Seller is not responsible or liable for the design of the products of the Customer and it is the responsibility of the Customer to determine that the Seller's product is safe, complies with application laws and regulations, and is technically or otherwise fit for its intended use. Seller does not endorse or claim suitability of its products for a specific application and disclaims each and every representation or warranty, whether express or implied, in that respect.

Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values.

Copyright © Envalior 2023. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Envalior.

# Akulon® Diablo

Print date: 2024-03-05

## GENERAL PROCESSING SETTINGS

### Screw rotation speed

To realize a good and homogeneous melt, and to avoid high shear on the screw, it is advised to set a screw rotation speed resulting in a plasticizing time that is just within the cooling time.

### Injection speed

Moderate to high injection speeds are required in order to prevent premature crystallization in the mold during injection phase and to obtain a good wall thickness distribution and a good surface finish.

### Blow up pressure

To get optimal part it is preferred to blow up quick, with minimal 8 bar air pressure, via a big hole. 10 bar is even better to have the best copy of the mold print /profiles

### Cooling Time

Actual cooling time will depend on part geometry and dimensional quality requirements as well as the tool design.

## RESIDENCE TIME

Melt residence time (MRT) for Akulon® Diablo in general should not exceed 6 minutes with preferably at least 50% of the maximal shot volume used. A formula to estimate this MRT is described below

$$MRT = \frac{\pi D^3 \rho}{m} * \frac{t}{60}$$

Whereas:

MRT = Melt Residence Time [minutes]

D = Screw Diameter [cm]

P = Melt Density [g/cm<sup>3</sup>] use 1.2

M = Shot Weight [g]

T = Cycle Time [s]

Optimal melt residence time for Akulon® Diablo is ± 4 minutes.

Remark:

According to the head design, most of the heads work according the principle first in first out, but cushion should remain as small as possible.

### All the trademarks mentioned here are trademarks of Envalior.

Seller represents and warrants exclusively that on the date of delivery by Seller the product shall be in conformity with the specifications agreed upon. Seller makes no other representations or warranties, whether express or implied.

Seller is not responsible or liable for the design of the products of the Customer and it is the responsibility of the Customer to determine that the Seller's product is safe, complies with application laws and regulations, and is technically or otherwise fit for its intended use. Seller does not endorse or claim suitability of its products for a specific application and disclaims each and every representation or warranty, whether express or implied, in that respect.

Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values.

Copyright © Envalior 2023. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Envalior.

# Akulon® Diabolo

Print date: 2024-03-05

## **SAFETY**

For the safety properties of the material, we refer to our MSDS which can be ordered at our sales offices. During practical operation we advise to wear personal safety protections for hand/eye/body.

## **STARTUP/SHUT DOWN/CLEANING**

Production has to be started and stopped with a clean machine.  
Cleaning can be done with applicable cleaning agents or HDPE.

## **PRODUCTION BREAKS**

During production breaks longer than a few minutes, we advise emptying the barrel and accumulator. The temperature of the barrel should be reduced to a level far enough below the melting point of the material in order to stop decomposition of the material.

When the screw is blocked, be aware that under these conditions a sudden outburst of molten material can take place. Always wear personal safety protections for hand/eye/body.

### **All the trademarks mentioned here are trademarks of Envalior.**

Seller represents and warrants exclusively that on the date of delivery by Seller the product shall be in conformity with the specifications agreed upon. Seller makes no other representations or warranties, whether express or implied.

Seller is not responsible or liable for the design of the products of the Customer and it is the responsibility of the Customer to determine that the Seller's product is safe, complies with application laws and regulations, and is technically or otherwise fit for its intended use. Seller does not endorse or claim suitability of its products for a specific application and disclaims each and every representation or warranty, whether express or implied, in that respect.

Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values.

Copyright © Envalior 2023. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Envalior.