

Novamid[®] 2430AH2

PA6/66

Blow Molding and Extrusion Grade, High Viscosity, Lubricated, Heat Stabilized, Blow Molding Grade

Print Date: 2025-10-04


PROPERTIES	TYPICAL DATA	UNIT	TEST METHOD
MECHANICAL PROPERTIES	DRY / COND		
Tensile modulus	2500 / –	MPa	ISO 527-1/-2
Yield stress	72 / –	MPa	ISO 527-1/-2
Yield strain	4.1 / –	%	ISO 527-1/-2
Nominal strain at break	>50 / –	%	ISO 527-1/-2
Flexural modulus	2300 / –	MPa	ISO 178
Flexural strength	84 / –	MPa	ISO 178
Charpy impact strength (+23°C)	N / –	kJ/m²	ISO 179/1eU
Charpy notched impact strength (+23°C)	2.6 / –	kJ/m²	ISO 179/1eA
THERMAL PROPERTIES	DRY / COND		
Melting temperature (10°C/min)	193 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	49 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	76 / *	°C	ISO 75-1/-2
OTHER PROPERTIES	DRY / COND		
Humidity absorption	3.5 / *	%	Sim. to ISO 62
Density	1120 / –	kg/m³	ISO 1183
MATERIAL SPECIFIC PROPERTIES	DRY / COND		
Viscosity number	246 / *	cm³/g	ISO 307, 1157, 1628
RSV formic acid, 1g/100ml	3.6	–	Envalior Method

Seller represents and warrants exclusively that on the date of delivery by Seller the product shall be in conformity with the specifications agreed upon. Seller makes no other representations or warranties, whether express or implied. Seller is not responsible or liable for the design of the products of the Customer and it is the responsibility of the Customer to determine that the Seller's product is safe, complies with application laws and regulations, and is technically or otherwise fit for its intended use. Seller does not endorse or claim suitability of its products for a specific application and disclaims each and every representation or warranty, whether express or implied, in that respect. Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values. Copyright © Envalior 2025. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Envalior.

Novamid® 2430AH2

Print Date: 2025-10-04

Viscosity-shear rate

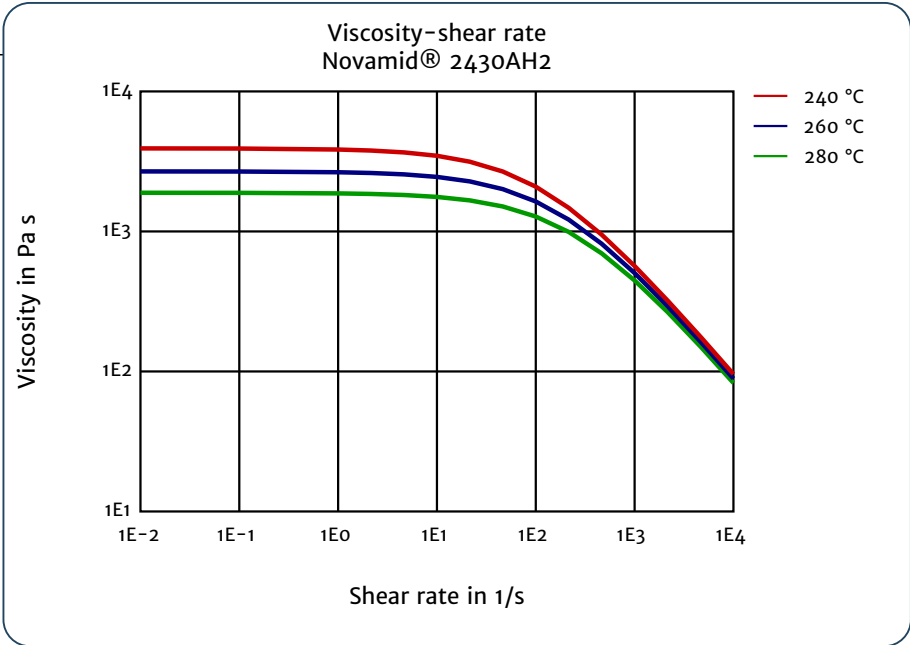

Seller represents and warrants exclusively that on the date of delivery by Seller the product shall be in conformity with the specifications agreed upon. Seller makes no other representations or warranties, whether express or implied.

Seller is not responsible or liable for the design of the products of the Customer and it is the responsibility of the Customer to determine that the Seller's product is safe, complies with application laws and regulations, and is technically or otherwise fit for its intended use. Seller does not endorse or claim suitability of its products for a specific application and disclaims each and every representation or warranty, whether express or implied, in that respect.

Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values.

Copyright © Envalior 2025. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Envalior.